


ZYNAVEX+

Residential Energy Storage Solution

Na48160R

48V 160Ah 7.3kWh

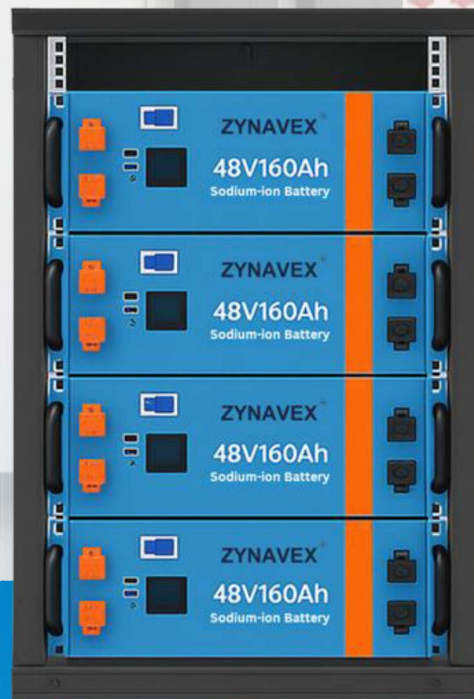

ADVANTAGE



Ultra long cycle life



High energy density



Easy to install and upgrade



High operational reliability



Optimizing monitoring strategy via remote control/diagnostics



Built-in intelligent battery management system protects the battery pack and prolongs its service life




Flexible and Expandable

Specification

Specification	
Nominal Voltage	45.76V (1P16S)
Nominal Capacity	160Ah
Continuous Discharge Power	4576W
Cycle Life Monthly	≥8000 Cycles
Self-discharge	≤3.0%
Communication Interface	RS485/CAN
Charge Voltage	55.2V
Max. Charge Current	100A
Max. Continuous Current	100A
Discharge Cut-off Voltage	24V
Charge Temperature	0°C~60°C
Discharge Temperature	-40°C~60°C ≤95%
Storage Temperature	0°C~35°C ≤85%
Dimensions (W*D*H)	442*230*720mm±2mm
Weight	79Kg±2Kg

ZYNAVEX+

Zynavex Sdn. Bhd.

 +6-011-66368966

 <https://www.zynavex.com>

 support@zynavex.com
